

Bubbler Valves

Model 5051LF

Lead free, self-closing, lever handle valve with adjustable stream regulation; integral, chrome plated brass basin shank; 1/2" O.D. slip joint supply. Vandal resistant pins prevent turning of fixture. This valve exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead. Dimensions: bottom of flange to top, 6 3/8"; flange diameter, 2".






Service Instructions for Model 5051LF:

If stream height of water is unsatisfactory, remove nut cap (18) and "O" ring (15) and adjust stream by turning slotted adjusting screw (17) clockwise to lower or turn off, counter clockwise to raise. If this fails to improve stream, or if valve is malfunctioning, replace damaged components with the 5800VRKR valve repair kit.

Note: Components for 5051LF are interchangeable with 5051 bubbler valve.



Repl. Part #	Item #	Description
5830HS	1	CAP HANDLE PCP
	2	PIN-LOCK
	3	NUT, THRUST
	4	WASHER, THRUST
	5	LEVER HANDLE W/ SET SCREW
	6	RETAINER BALL
	7	BONNET CAP
	8	WASHER, BONNET
	9	PACKING FELT
	10	GLAND PACKING
	11	SPRING
	12	STEM
	13	WASHER SEAT
	14	SCREW, SEAT WASHER
5800VRKR	6	RETAINER BALL
	8	WASHER, BONNET
	9	PACKING FELT
	11	SPRING
0006863494.3	15	WASHER, CAP NUT
	16	WASHER, BOTTOM CAP 5830
0005181110.1	17	ADJUSTING SCREW
0004607511.1	18	CAP NUT
0002710721.1	5	LEVER HANDLE W/ SET SCREW

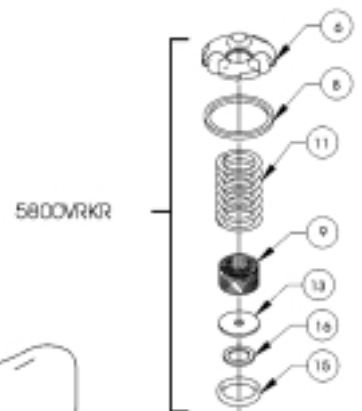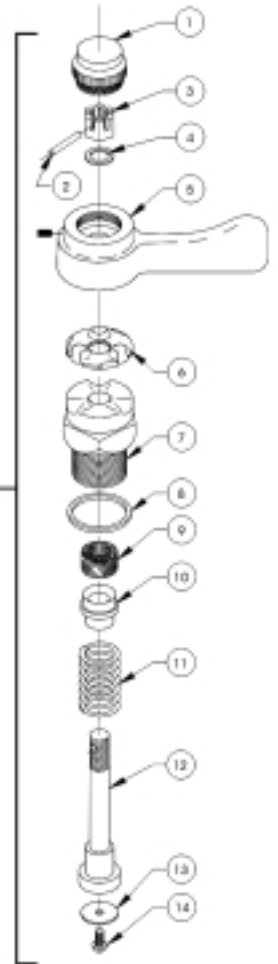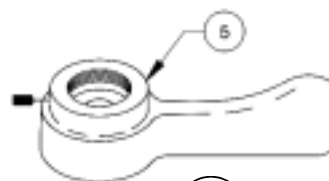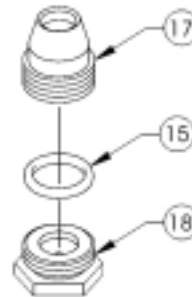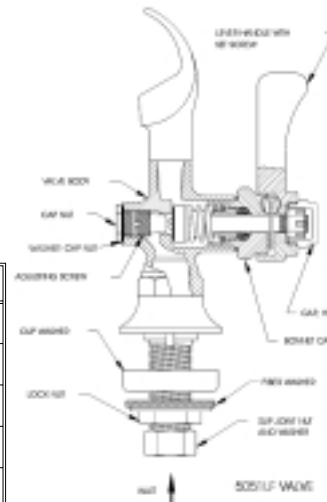

Certified to NSF-61 Section 9

LEAD FREE