

# Bubbler Valves



## Model 5054LF:

Lead free self-closing, lever handle valve with automatic stream regulation; integral, chrome plated brass basin shank; 1/2" O.D. slip joint supply. Vandal resistant pins prevent turning of fixture. This valve exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead. Dimensions: bottom of flange to bubbler orifice, 2"; shank length, 4"; flange dia., 2"; shank dia., 13/16".

### Servicing Instructions for Model 5054LF:

If stream height of water is unsatisfactory, check the following.

- ❶ Verify 30 PSI minimum supply line pressure.
- ❷ Remove slip joint nut and washer to check flow control (16) for obstruction and verify correct installation. Remove and clean. If problem continues, replace flow control.
- ❸ If above fails to improve stream, or if valve is malfunctioning, replace damaged or worn components with the 5800VRKR repair kit.

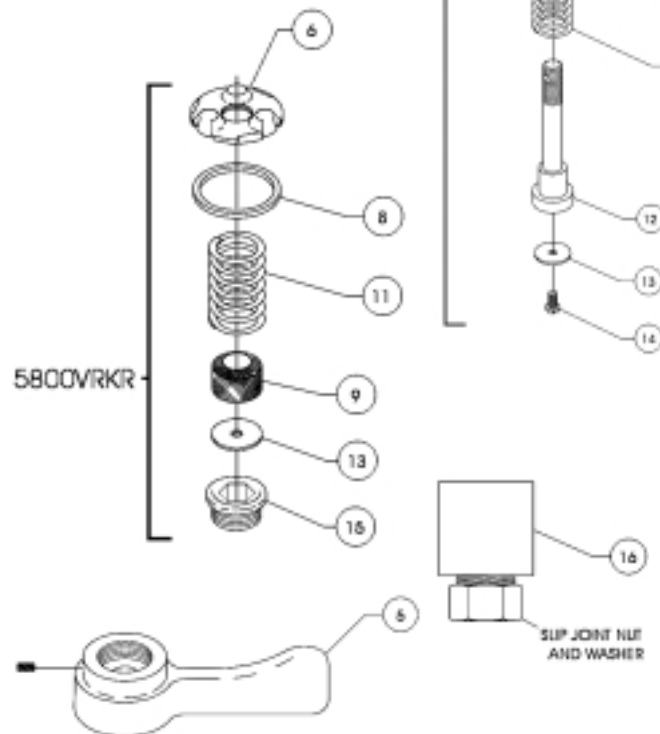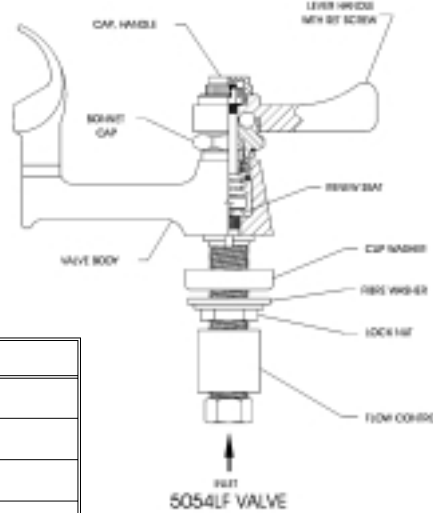

Repl. Part #	Item #	Description
5830HS	1	CAP HANDLE PCP
	2	PIN-LOCK
	3	NUT, THRUST
	4	WASHER, THRUST
	5	LEVER HANDLE W/ SET SCREW
	6	RETAINER BALL
	7	BONNET CAP
	8	WASHER, BONNET
	9	PACKING FELT
	10	GLAND PACKING
	11	SPRING
	12	STEM
	13	WASHER SEAT
	14	SCREW, SEAT WASHER
5800VRKR	6	RETAINER BALL
	8	WASHER, BONNET
	9	PACKING FELT
	11	SPRING
	13	WASHER SEAT
6394	16	FLOW CONTROL
	0002710721.1	5



Certified to NSF-61 Section 9

LEAD FREE