


Bubbler Valves

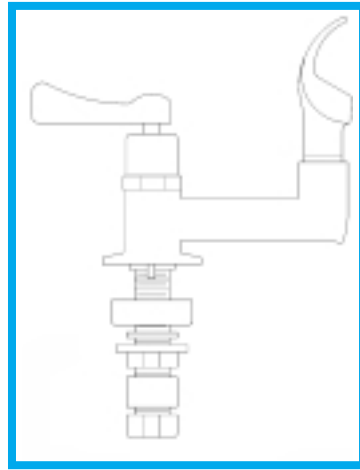



Model 5056:

Self-closing, lever handle valve with automatic stream regulation; integral, chrome plated brass basin shank; 1/2" O.D. slip joint supply. Vandal resistant pins prevent turning of fixture. Designed for deck or sink mounting. This valve exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead. Dimensions: bottom of flange to top, 5 5/8"; shank length, 2"; flange dia., 2 1/4"; shank dia., 13/16". This valve has been discontinued and only component parts are available.

Servicing Instructions for Model 5056:

If stream height of water is unsatisfactory, check the following:

- 1 Verify 30 PSI minimum supply line pressure.
- 2 Remove slip joint nut and washer to check flow control (15) for obstructions and verify correct installation. Remove and clean. If problem continues, replace flow control.
- 3 If above fails to improve stream, or if valve is malfunctioning, replace damaged or worn components with the VRK5832.

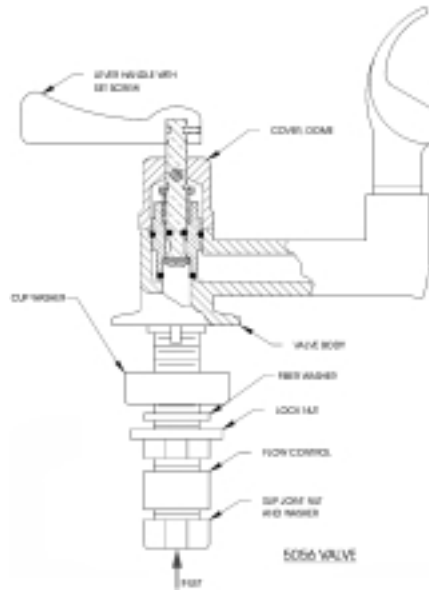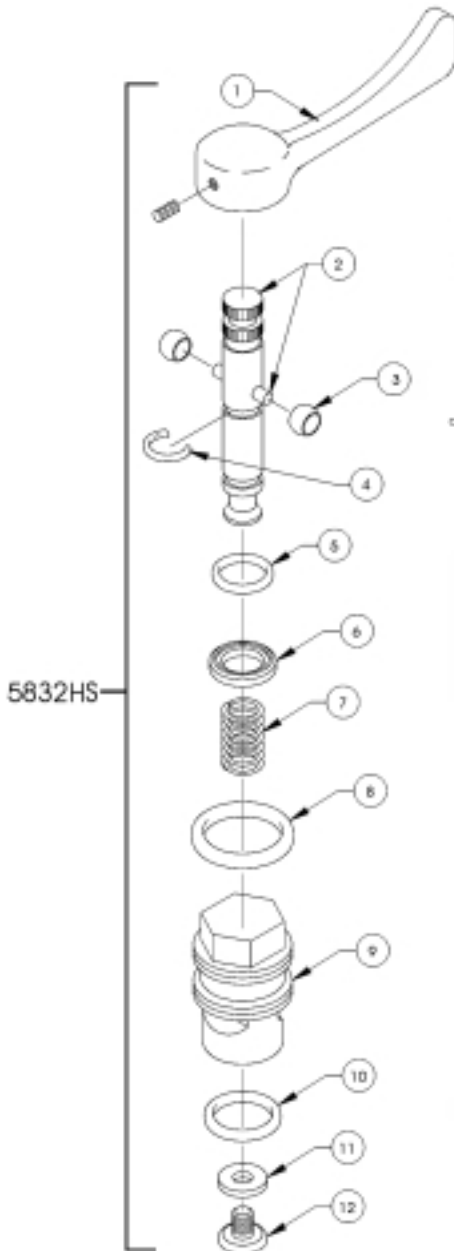

Repl. Part #	Item #	Description
5832HS (Includes items 1-12)		
0002689100	1	Handle Lever Blank with Set Screw
	2	Spindle with Pin
	6	Washer Retainer
	8	"O" Ring Cover
	9	Cover
VRK5832	3	Roller (2 req'd)
	4	Circlip
	5	"O" Ring Spindle
	7	Spring
	10	"O" Ring Seal
	11	Washer Neoprene
	12	Screw, Seat Washer Retainer
6394	15	Flow Control

LEAD FREE



Certified to NSF-61 Section 9