Pantry Faucets

❒Model 5452LF:

Lead free polished chrome plated brass 3/8" gooseneck pipe locked to body. Includes self closing, lever handle valve with renewable seat; integral basin shank; ½" O.D. slip joint supply. Equipped with a vandal resistant aerator. Pin in base prevents turning of fixture. This pantry faucet exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead. Dimensions : Center supply to center spout outlet, 4 ½"; bottom of flange to extreme top of faucet, 10 9/16"; bottom of flange to spout outlet, 6"; flange diameter, 2"; shank diameter, 13/16".

Servicing Instructions for Model 5452LF:

If water flow is unsatisfactory, remove aerator (16) with removal key and clear any obstructions. If this fails, verify 30 PSI minimum supply line pressure is available and that supply stop is fully opened. If valve is malfunctioning, replace damaged or worn components with 5800VRKR.

Note: The 5452LF components are interchangeable with the 5452 faucet.

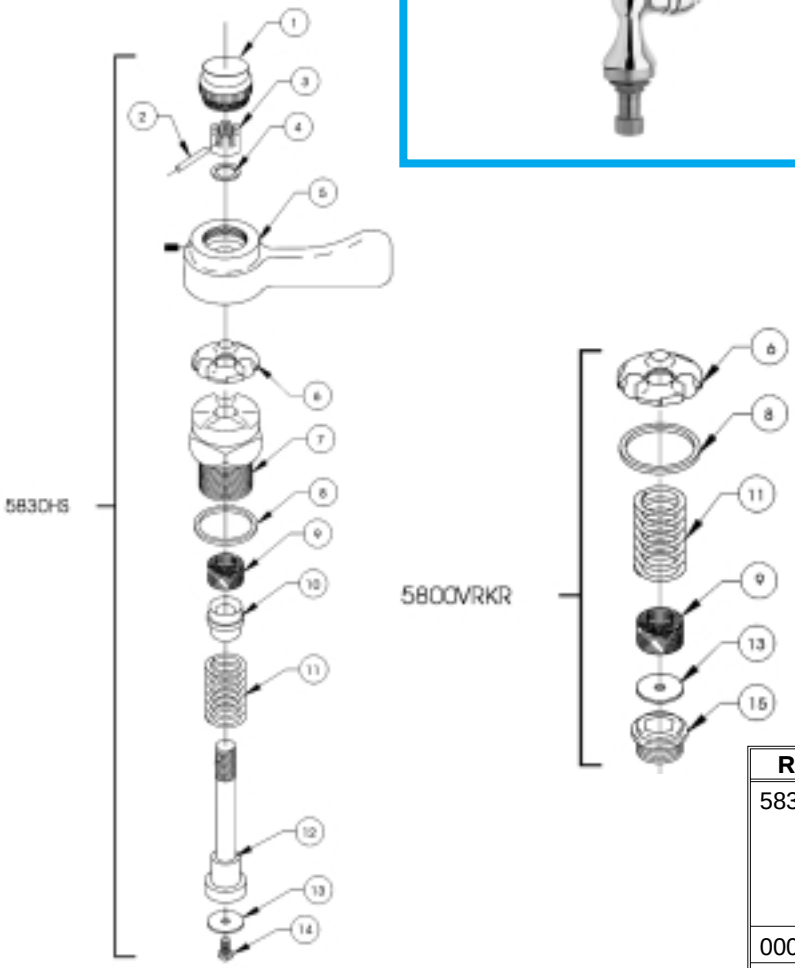



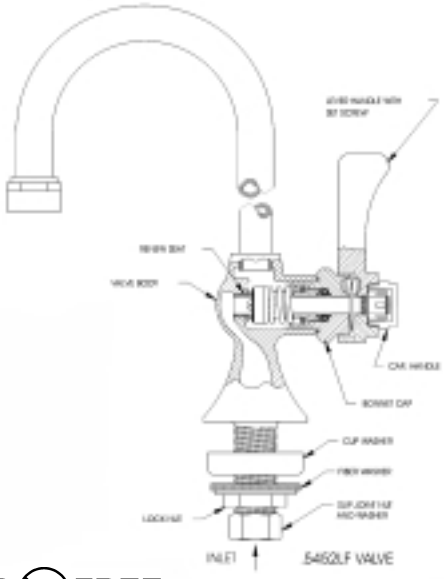

Repl. Part #	Item #	Description
5830HS	1	Cap Handle PCP
	2	Pin-Lock
	3	Nut, Thrust
	4	Washer, Thrust
0002710721.1	5	Lever Handle with Set Screw
	6	Retainer Ball
	7	Bonnet Cap
	8	Washer Bonnet
	9	Packing Felt
	10	Gland Packing
	11	Spring
	12	Stem
	13	Washer Seat
	14	Screw, Set Washer
5800VRKR	6	Retainer Ball
	8	Washer Bonnet
	9	Packing Felt
	11	Spring
	13	Washer Seat
	15	Seat, Renew
000086686.2	16	Aerator with Key

LEAD Pb FREE

NSF Certified to NSF-61/Section 9