


# Bib Faucets

## Model 6250LF

Lead free self-closing, plain end lead free brass bib faucet assembly with polished chrome plated finish. Assembly includes extension nipple, locknuts, and tee. This assembly is used on pedestal drinking fountain Models 3300, 3300G, 3377 and 3377G. ½" NPT(F) inlet. This bib faucet exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead.

**Note:** Model 6235 uses the 6250LF faucet.

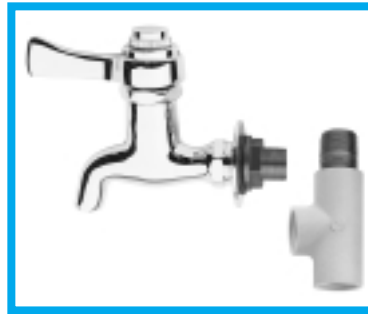

## Model 6250.60LF

Lead free self-closing, plain end bib faucet assembly with polished chrome plated finish. Assembly includes stainless steel mounting plate, mounting screws, extension nipple, and tee. This assembly is for use on Models 3060, 3121, 3177 and 3150 concrete pedestal fountains that come equipped with a second access plate opening. ½" NPT(F) inlet. This bib faucet exceeds the standards of the Safe Drinking Water Act and Lead Contamination Control Act. All components in the waterway contain less than 0.1% lead.




### Servicing Instructions for Models

#### 6235, 6250LF, and 6250.60LF:

To repair this valve, order the 5800VRKR or 5830HS.

Repl. Part #	Item #	Description
5830HS	1	Cap Handle PCP
	2	Pin-Lock
	3	Nut, Thrust
	4	Washer, Thrust
	5	Handle, Lever with Set Screw
	6	Retainer Ball
	7	Bonnet Cap
	8	Washer, Bonnet
	9	Packing Felt
	10	Gland Packing
	11	Spring
	12	Stem
	13	Washer Seat
	14	Screw, Seat Washer
5800VRKR	6	Retainer Ball
	8	Washer, Bonnet
	9	Packing Felt
	11	Spring
	13	Washer Seat
	15	Seat, Renew
0002710721.1	5	Handle, Lever with Set Screw

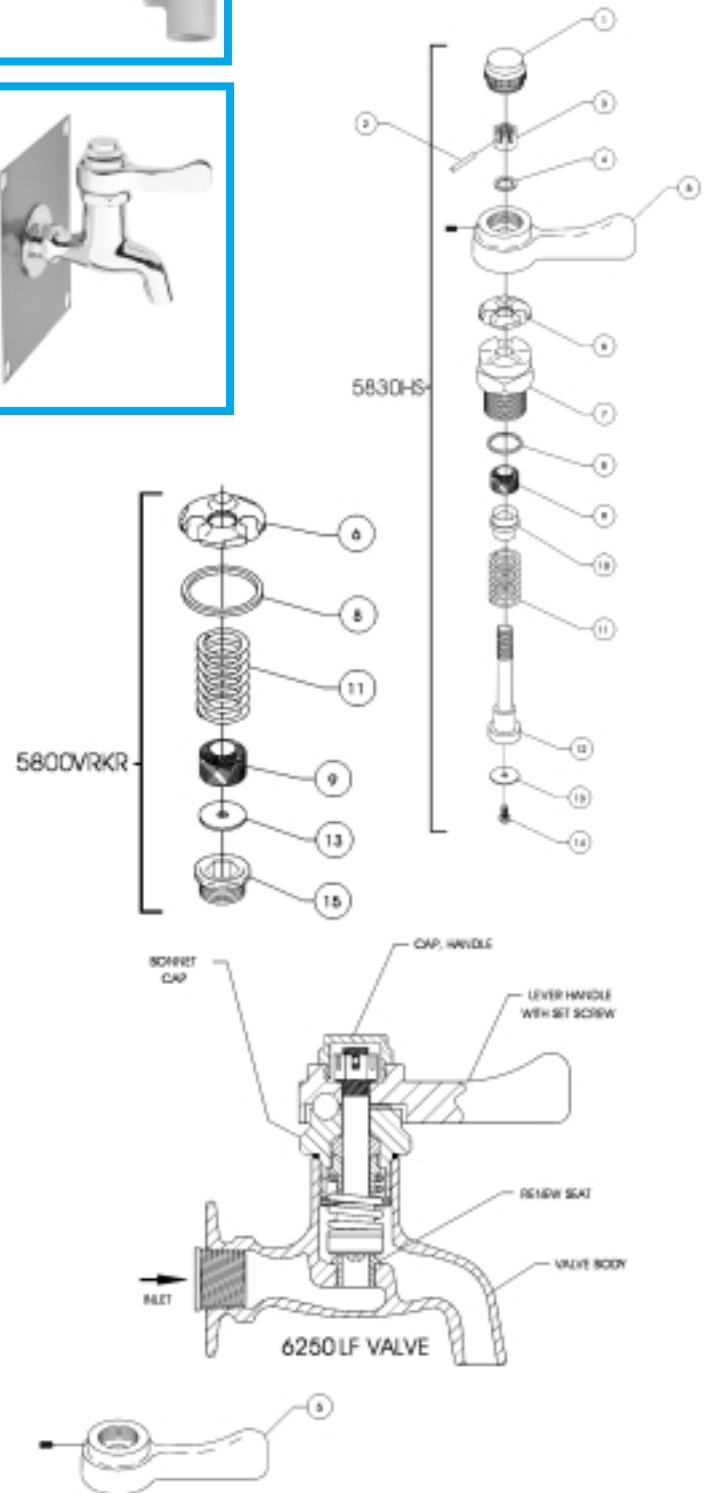

Certified to NSF-61 Section 9

LEAD FREE